

HANDLINE NOZZLES




PHANTOM®

Phantom®

The selectable gallonage Phantom® lets the firefighter select the appropriate flow. The wide selection range standard with the Phantom® makes it one nozzle for every use from brush to interior attack. The Phantom® is designed for reliable performance with rugged metal selector ring and dual drive metal ball shut-off. Available standard in 100 psi and true 75 psi models.

HANDLINE NOZZLES


1-11

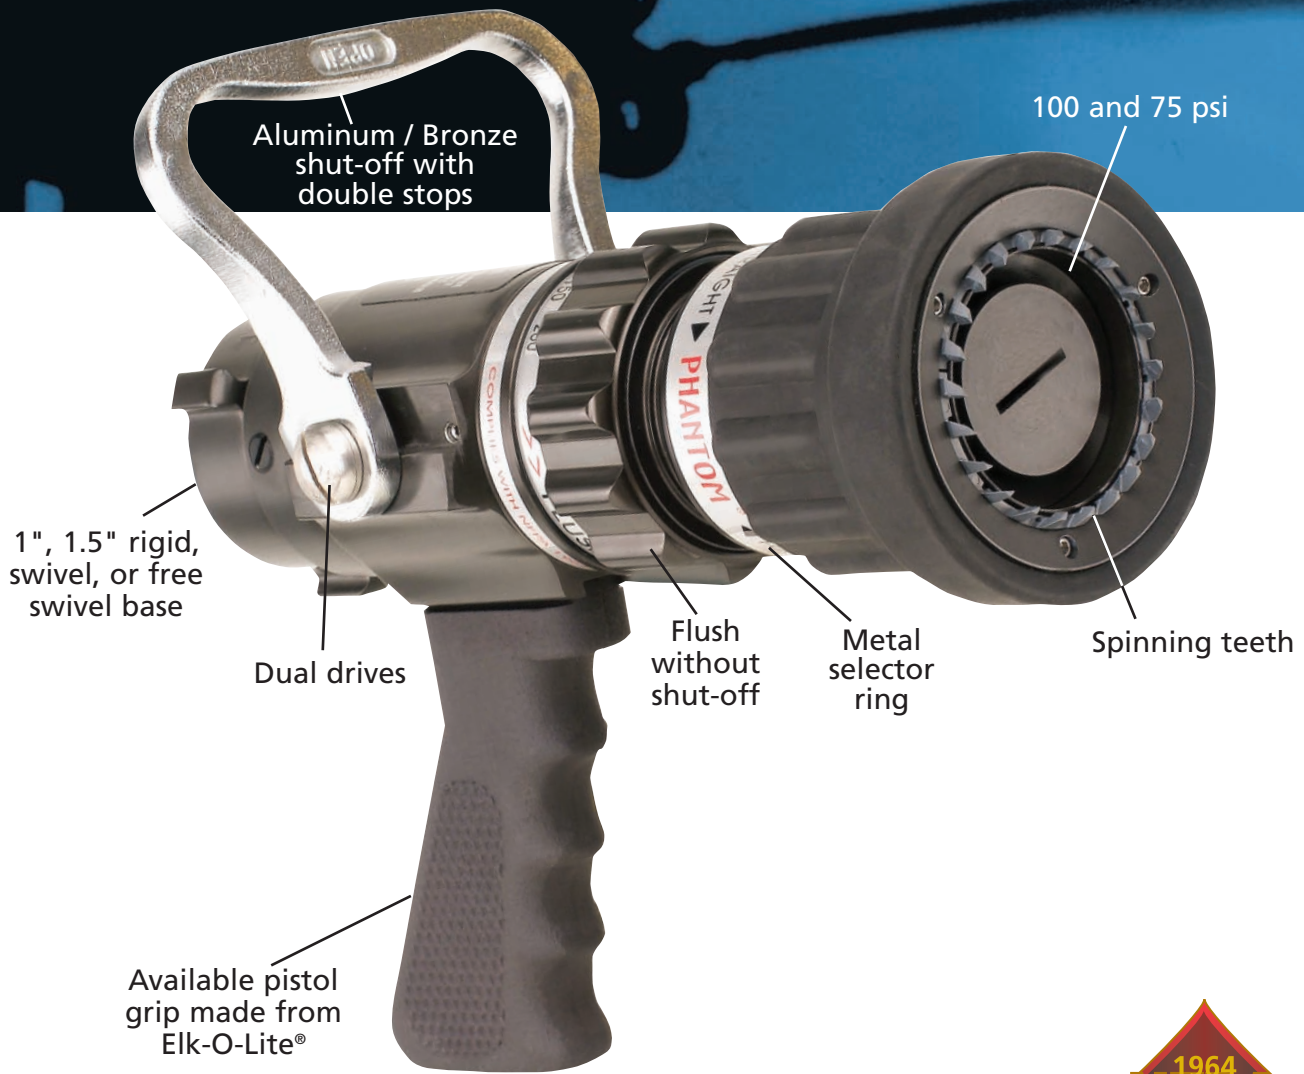

Base Size	FLOW RATES	PRESSURE	Break-Apart Components	GRIP		SHUT-OFF		HANDLE		BASE		TEETH	DIMENSIONS		Model	Figure		
	GPM (LPM)	PSI (BAR)		Pistol Grip	Twist	Ball	Tab	Horseshoe	Rigid	Swivel	Free Swivel		Length (Inches)	Weight (Lbs.)				
1"	15/30/45/60 (57/114/170/227)	100 (6.89)				•	s	o			s	s	9.50	3.71	PSFS-HP	1		
											s	s	9.50	4.18	PSFS-HPG	1		
												s		s	6.375	2.15	TSPFS-HP (Tip Only)	2
							•					s		s	6.375	2.15	TSPFS-HPT (Tip Only)	2
1.5"	30/95/125/150/200 (114/360/473/568/757)	100 (6.89)				•	o	s		s	o	s	10.50	4.90	SFM-HP	1		
											o	s	s	10.50	5.36	SFM-HPG	1	
												s		s	7.75	2.93	TFSFM-HP (Tip Only)	2
							•					s		s	7.75	2.93	TFSFM-HPT (Tip Only)	2
		75 (5.17)					•	o	s		s	o	s	10.50	4.90	SFM-LP	1	
							•	o	s		o	s	s	10.50	5.36	SFM-LPG	1	
			TFSFM-LP +B 275-A				•	o			s	o	s	12.175	5.18	STSFM-LP		
												s		s	7.75	2.93	TFSFM-LP (Tip Only)	2
					•				s		s	7.75	2.93	TFSFM-LPT (Tip Only)	2			

Key s = standard o = option

PHANTOM® CONFIGURATIONS

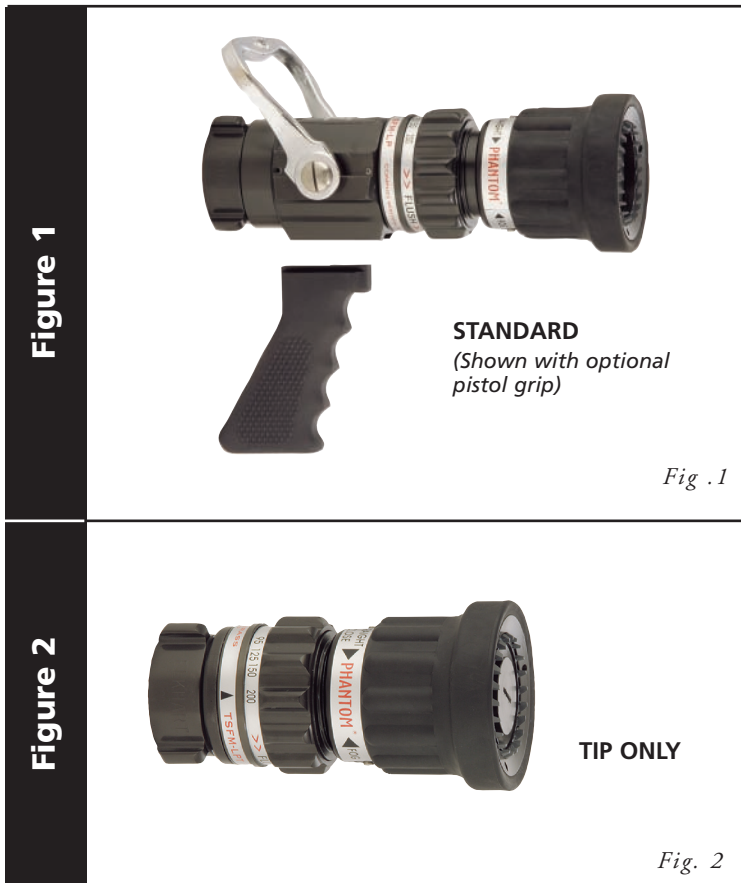

Figures depict general product types only and are not intended to be inclusive of all product features.

OPTIONS

COLORS

black	red	orange	green	blue	yellow	white
-------	-----	--------	-------	------	--------	-------

Color options available for pistol grip, bumper, and handle. **White bumper not available.** Phantom® nozzle standards are a black bumper, rough chrome handle and natural Elk-O-Lite® pistol grip.

HANDLES

TAB	HORSESHOE
-----	-----------

THREADS

All nozzles are NHT unless otherwise specified. See index T-12 for optional base threads, including British instantaneous.

METRIC

When ordering the metric version of a 1" Phantom nozzle, the flow rate will be set and labeled at 60/120/180/240 LPM (15/32/47/64 gpm).

BREAK-APART COMPONENTS

Ball shut-offs and/or playpipes referenced here may be found on page 1-24.